

MADE IN USA

NEW!



**Reeltek
Color
Options**


ReelTek Reels



Patent Pending

Rely on ReelTek

A lighter, auto-rewind hose reel designed for air, water, oil and grease applications.

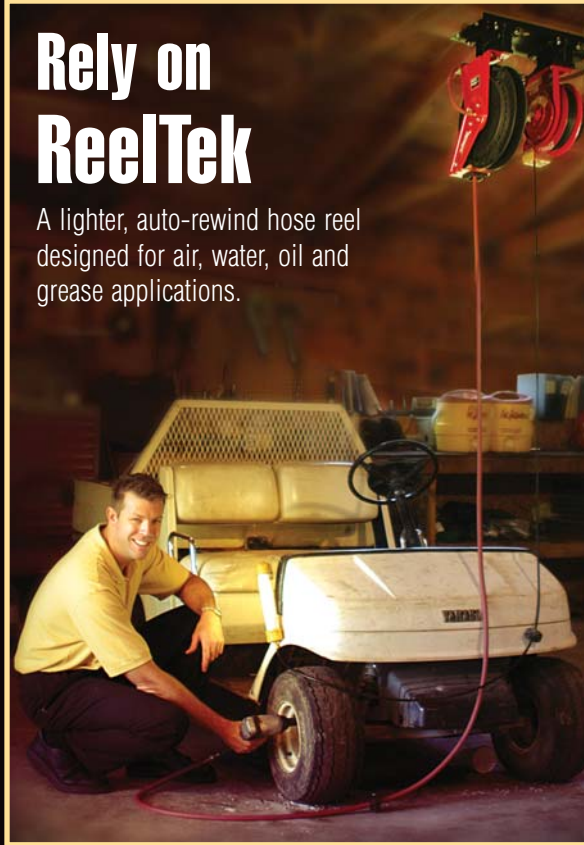

The Links of Eagle Glen, Columbia City, IN



REELCRAFT

Wind Things Up With Reelcraft

Form # 1122-802

Reelcraft Industries is
ISO 9001:2000
Certified Since 1996

www.reelcraft.com

Spring Driven Air/Water/Oil/Grease

Series RT - 1/4", 3/8", 1/2" I.D.

Reelcraft presents ReelTek, a lighter, spring-driven hose reel designed for applications that are less demanding, yet require a product that can withstand industrial use. ReelTek's professional grade design incorporates industrial-grade steel and composite material to virtually eliminate corrosion.



NEW!



RT650-OLP
Patent Pending

		DIMENSIONS	
		Series RT	
		in / mm	
	A	See chart	
	E	16 1/2	419
	G	17 7/8	448
	X	2 1/4	57
	Y	6	152

MODELS WITH HOSE				HOSE CAPACITY				MODELS WITHOUT HOSE			
MODEL	WEIGHT	PRESSURE	I.D.	O.D.	(M)NPTF	(F)NPTF	LENGTH	MODEL	WEIGHT	PRESSURE	A
	lbs / kg	psi / bar	in / mm		in	in			ft / m	lbs / kg	psi / bar
LOW PRESSURE AIR/WATER REELS Maximum Temperature 150° F (65° C)											
RT425-OLP	21 10	300 21	1/4 6	.500 13	1/4	3/8	25 8	RT402-OLP	19 9	300 21	5 3/4 146
RT435-OLP	22 11	300 21	1/4 6	.500 13	1/4	3/8	35 11	RT403-OLP	19 9	300 21	5 3/4 146
RT450-OLP	25 12	300 21	1/4 6	.500 13	1/4	3/8	50 15	RT405-OLP	21 10	300 21	5 3/4 146
RT625-OLP	22 11	300 21	3/8 10	.640 16	1/4	3/8	25 8	RT602-OLP	19 9	300 21	5 3/4 146
RT635-OLP	23 11	300 21	3/8 10	.640 16	1/4	3/8	35 11	RT603-OLP	19 9	300 21	5 3/4 146
RT650-OLP	29 14	300 21	3/8 10	.640 16	1/4	1/2	50 15	RT605-OLP	23 11	300 21	6 1/4 159
RT825-OLP	28 13	300 21	1/2 13	.781 20	1/4	1/2	25 8	RT802-OLP	23 11	300 21	6 1/4 159
RT835-OLP	30 14	300 21	1/2 13	.781 20	1/2	1/2	35 11	RT803-OLP	23 11	300 21	6 1/4 159
RT850-OLP	35 16	300 21	1/2 13	.781 20	1/2	1/2	50 15	RT805-OLP	25 12	300 21	7 3/4 197
MEDIUM PRESSURE OIL REELS Maximum Temperature 150° F (65° C)											
RT625-OMP	27 12	1000 69	3/8 10	.640 16	3/8	3/8	25 8	RT602-OMP	22 10	1000 69	5 3/4 146
RT635-OMP	30 14	1000 69	3/8 10	.640 16	3/8	3/8	35 11	RT603-OMP	22 10	1000 69	5 3/4 146
RT650-OMP	35 16	1000 69	3/8 10	.640 16	3/8	1/2	50 15	RT605-OMP	25 12	1000 69	7 3/4 197
RT825-OMP	31 15	1000 69	1/2 13	.820 21	1/2	3/8	25 8	RT802-OMP	23 11	1000 69	6 1/4 159
RT835-OMP	33 16	1000 69	1/2 13	.820 21	1/2	1/2	35 11	RT803-OMP	23 11	1000 69	6 1/4 159
HIGH PRESSURE GREASE REELS Maximum Temperature 150° F (65° C)											
RT425-OHP	28 13	5000 345	1/4 6	.590 15	1/4	3/8	25 8	RT402-OHP	22 10	5000 345	5 3/4 146
RT435-OHP	31 15	5000 345	1/4 6	.590 15	1/4	3/8	35 11	RT403-OHP	22 10	5000 345	5 3/4 146
RT625-OHP	30 14	4000 276	3/8 10	.750 19	3/8	3/8	25 8	RT602-OHP	22 10	5000 345	5 3/4 146
RT635-OHP	34 16	4000 276	3/8 10	.750 19	3/8	1/2	35 11	RT603-OHP	23 11	5000 345	6 1/4 159
RT650-OHP	39 19	4000 276	3/8 10	.750 19	3/8	1/2	50 15	RT605-OHP	25 12	5000 345	7 3/4 197

USA: 800-444-3134 Europe: +44 (0) 1536 406999
Canada: 800-268-1756 Asia: 63-45-599-3721

www.reelcraft.com

Reelcraft Industries is
ISO 9001:2000
Certified Since 1996

Models listed with an icon can be shipped same day when the order is received by 11:30 AM local time for quantities of 5 or fewer.

Indiana Warehouse
 California Warehouse
 Indiana & California Warehouses
 Canadian Warehouse

ReelTek is ideal for...

- Light industrial
- Air-powered tools
- Assembly lines
- Machine shops
- Maintenance shops
- Auto/truck repair
- Auto paint & body
- Farm & ranch
- Woodworking
- Garden shops
- Home workshops
- Many more uses

Rely on ReelTek for convenience, versatility and value. Keep hoses organized, save time, improve safety, efficiency and extend hose life. ReelTek is available with or without hose, has a long swivel life and attaches to most surfaces that can be drilled. Rely on ReelTek to reduce tangled hoses and improve hose logistics.

Kinkless Hose

High quality, industrial-grade kinkless hose is specially blended for use on reels.

Long-Lasting Latch Spring


A stainless steel torsion spring is used on the latch to insure maximum life.

Corrosion Resistance

Steel components are individually powder coated and combined with composite materials, which virtually eliminates corrosion.

Long Swivel Life

Our precision, field-proven swivel assures long service life.

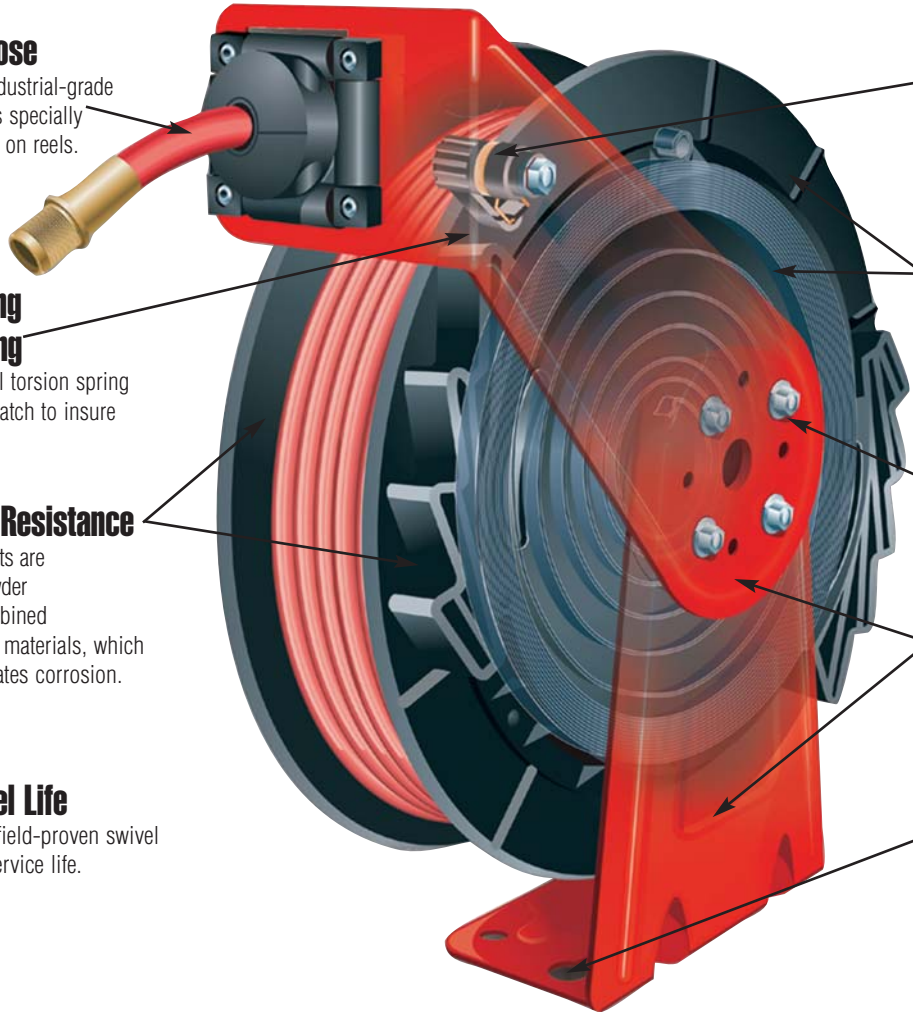

Hose Retracts Every Time

ReelTek's latch mechanism is mounted on the arm to insure hose extends and retracts every time.

Easy Maintenance

The glass-filled composite spool and spring case contains the industrial-grade drive-spring. The spring is protected from the environment for longer life.

Versatile Mounting

The guide arm can be adjusted to any of seven convenient locations.

Structural Strength

The base and guide arm are made of heavy gauge steel stampings, with re-enforced ribs to increase structural strength. Main shaft is 1" outside diameter (O.D.), cold-rolled steel.

Easy to Mount


The base has two slotted holes for easy mounting and adjustment.

Add a little color to your order.

Reeltek is now available in Yellow, Black, Blue. Call to place your order today.



RT625-OLP-YW42
Patent Pending

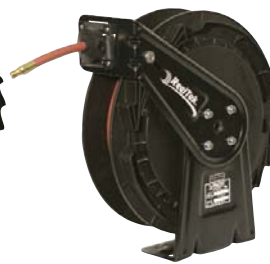

RT650-OLP-BK35
Patent Pending



RT625-OLP-BL40
Patent Pending



USA: 800-444-3134 Europe: +44 (0) 1536 406999
Canada: 800-268-1756 Asia: 63-45-599-3721

www.reelcraft.com



REELCRAFT


Wind Things Up With Reelcraft

MADE IN USA

Work Smarter




RT850-OLP
Patent Pending



△ 917-1097




△ MCAT-001



△ 737-1194



△ 1123-802



△ 735-1194

North America Corporate Headquarters

One Reelcraft Center • P.O. Box 248
Columbia City, IN 46725-0248
Ph: 800-444-3134 • Fax: 800-444-4587
Ph: 260-248-8188 • Fax: 260-248-2605
e-mail: reelcraft@reelcraft.com
www.reelcraft.com

Europe

Unit 17 • Cronin Courtyard
Weldon South Industrial Estate
Corby • Northamptonshire • NN18 8PS
United Kingdom
Ph: +44 (0) 1536 406999
Fax: +44 (0) 1536 406777
e-mail: europe@reelcraft.com

Asia Pacific

7550 A Bonifacio Ave., Carghaus Building
Clark special Economics Zone, Clark Field
Pampanga, Philippines
Ph: 63-45-599-3721
Fax: 63-45-599-3722
e-mail: rap@comclark.com

Latin America & The Middle East

Thompson International, Inc.
P.O. Box 12958
Ft. Wayne, IN 46866
Ph: 260-489-1685
Fax: 260-489-0203
e-mail: info@t-i-i.com

Australia

Recoila
PO Box 6463 BC, Blacktown,
NSW 2148, Australia
Ph: +61 (2) 9621 8988
Fax: +61 (2) 9621 7688
sales@recoila.com



Light Cord L4000 Series
Pneumatic Series RT

Patent Pending

The Links of Eagle Glen, Columbia City, IN



Wind Things Up With Reelcraft

Form # 1122-802

reelcraft.com

Reelcraft Industries is
ISO 9001:2000
Certified Since 1996